



**Stage Measurements:**

- 24,500 Square Feet
- 21,500 + Firelane
- 125 x 199 ft
- Combine Stages 1-3 for 80,000 SF Clearspan

**Ceiling Height:**

- 37 ft ceiling height
- 23 ft to bottom of grid

**Grid:**

- 100 x 100 ft Truss Spines Installed
- 75,000 lb load limit
- 20,000 lb per truss
- Additional Designs available through our preferred vendor Killswitch, Inc and Hopper Engineering

**Access:**


- Loading Dock plus w x h
- 18 x 14 ft Roll up Door
- Catwalk

**Power:**

- 2400 amps total draw
- 2x 400 amp with Dual Cam-Lock Disconnects
- 3-Phase 208v

**Floor:**

- 200 psf load concrete

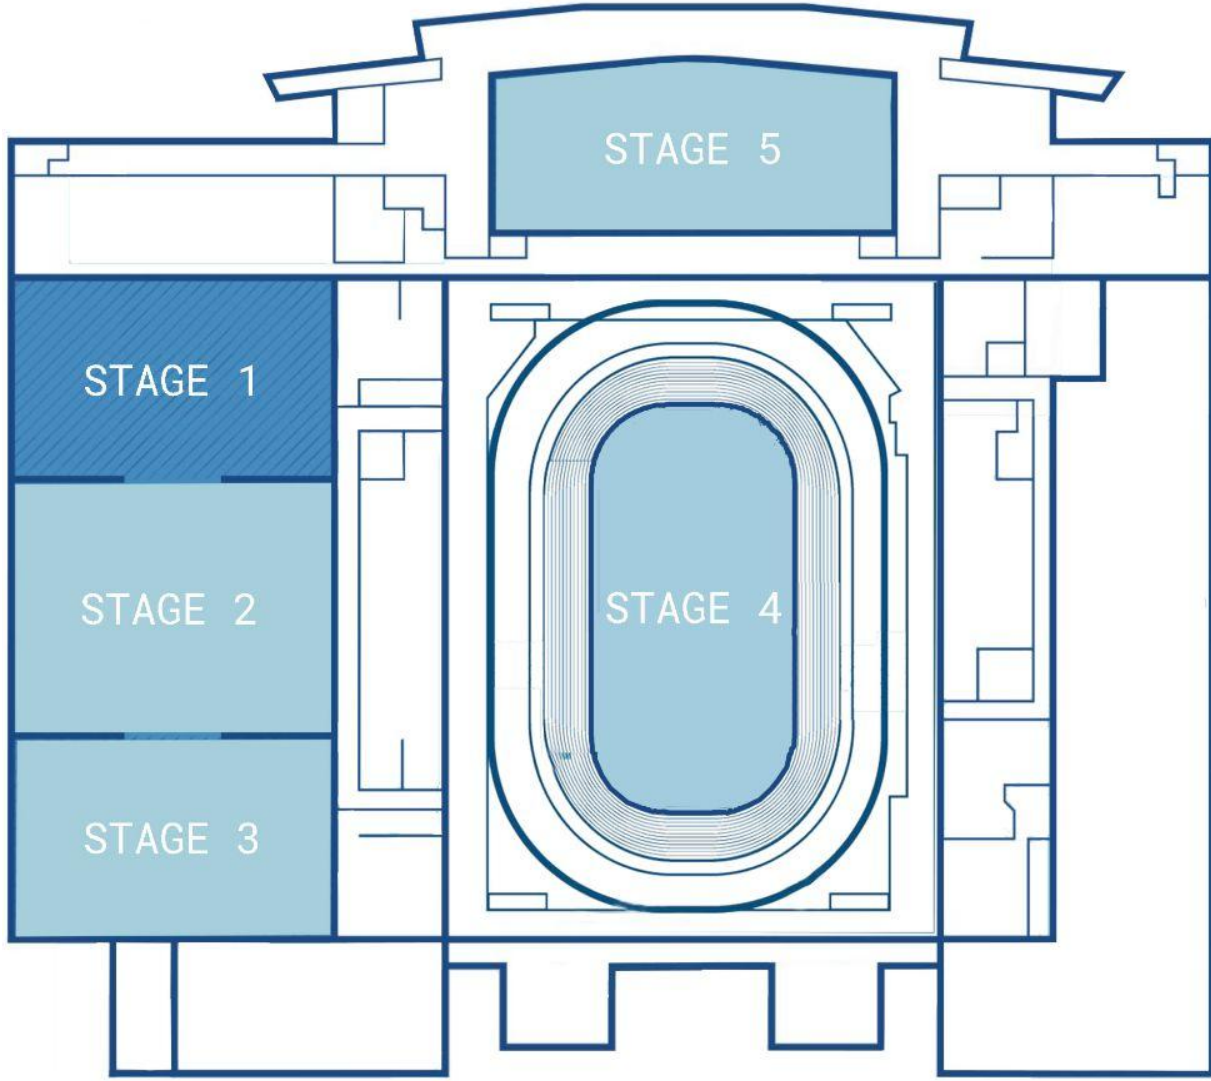



**Stage Measurements:**

- 31,500 Square Feet
- 28,000 + Firelane
- 159 x 199 ft
- Combine Stages 1-3 for 80,000 SF Clearspan

**Ceiling Height:**

- 37 ft ceiling height
- 23 ft to bottom of grid

**Grid:**

- 100 x 100 ft Truss Spines Installed
- 75,000 lb load limit
- 20,000 lb per truss
- Additional Designs available through our preferred vendor Killswitch, Inc and Hopper Engineering

**Access:**


- Catwalk

**Power:**

- 2400 amps total draw
- 2x 400 amp with Dual Cam-Lock Disconnects
- 3-Phase 208v

**Floor:**

- 200 psf load concrete

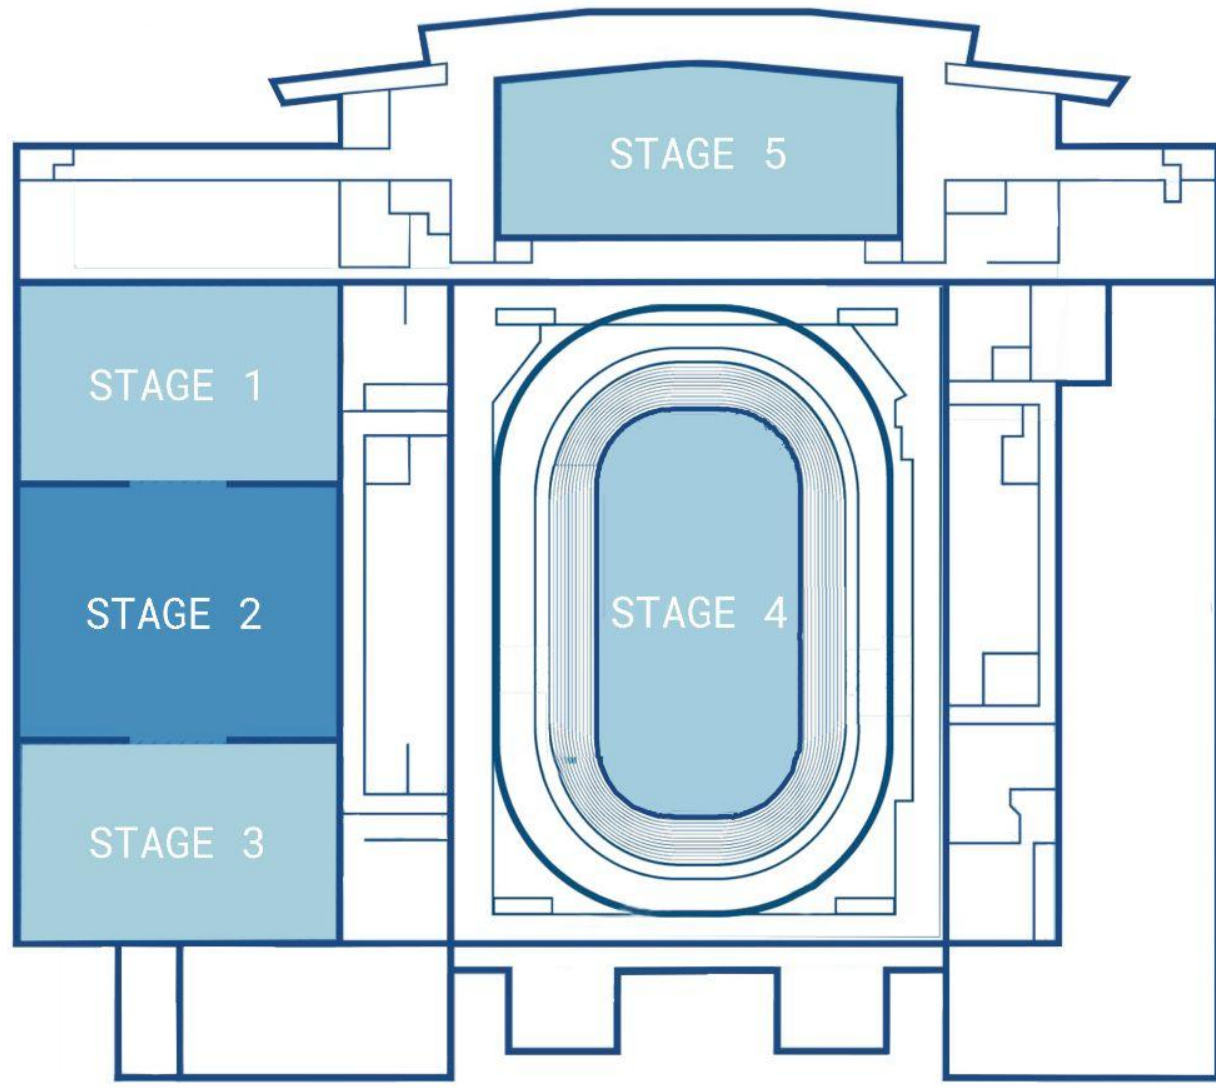



**Stage Measurements:**

- 24,500 Square Feet
- 21,500 + Firelane
- 125 x 199 ft
- Combine Stages 1-3 for 80,000 SF Clearspan

**Ceiling Height:**

- 37 ft ceiling height
- 23 ft to bottom of grid

**Grid:**

- None Installed
- 75,000 lb load limit
- 20,000 lb per truss
- Grid Designs available through our preferred vendor Killswitch, Inc and Hopper Engineering

**Access:**


- 2 Rollup Doors at w x h 24 x 20 ft each
- Catwalk

**Power:**

- 2400+ amps total draw
- 18x 100 amp floor boxes
- 3-Phase 208v

**Floor:**

- 200 psf load concrete

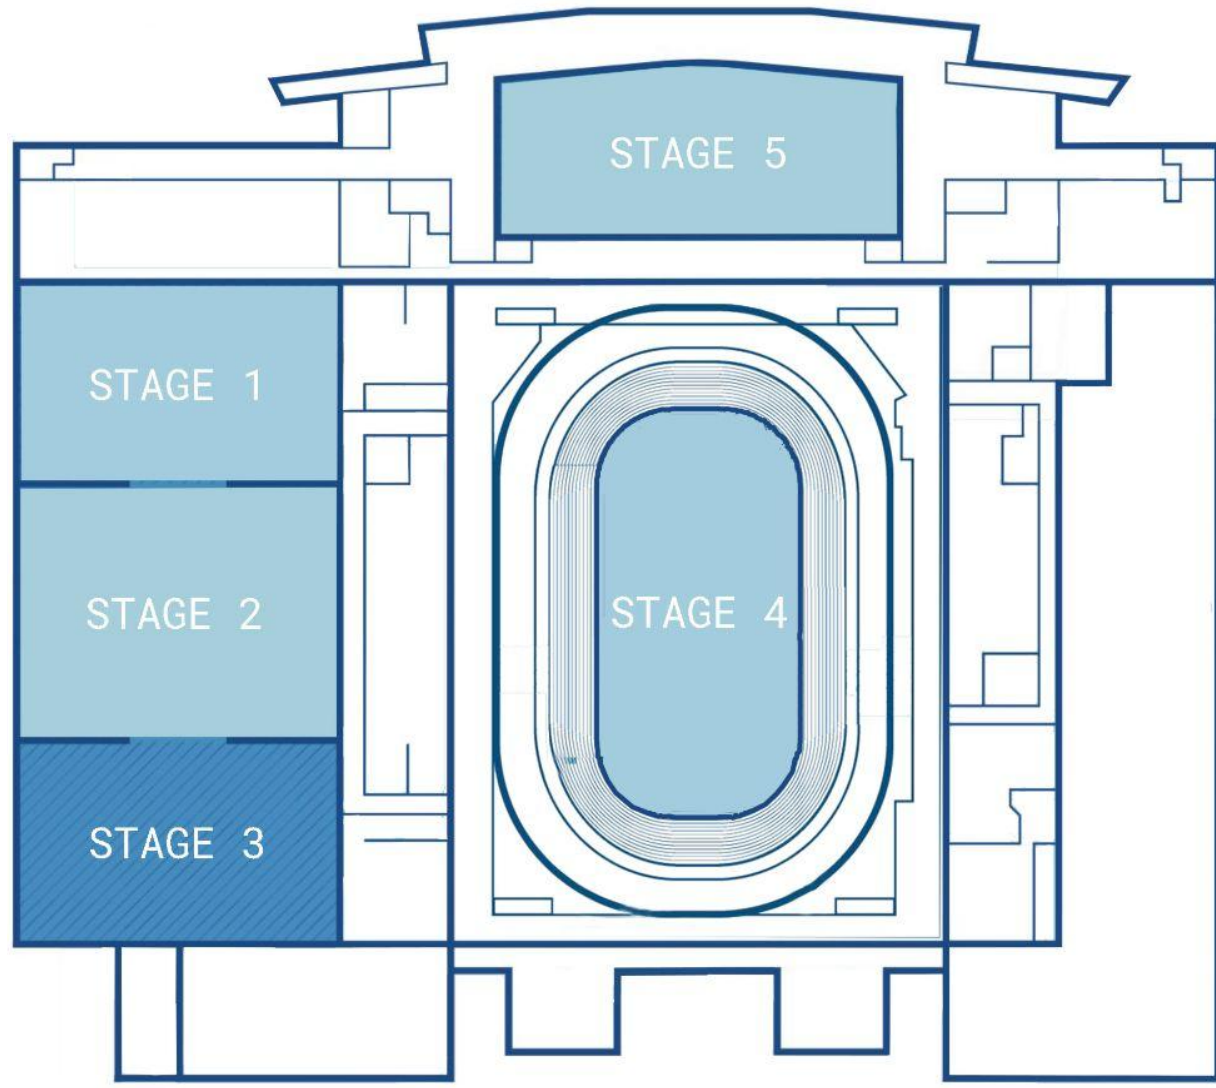



**Stage Measurements:**

- 32,000 Square Feet
- 28,000 + Firelane
- 245 x 130 ft

**Ceiling Height:**

- 80 ft ceiling height
- 65 ft to bottom of catwalk

**Grid:**

- None Installed
- 140,000 lb load limit
- 20,000 lb per catwalk (must be wrapped)
- Grid Designs available through our preferred vendor Killswitch, Inc and Hopper Engineering

**Access:**


- Roll up Door at w x h 24 x 20 ft
- Catwalk

**Power:**

- 2400+ amp total draw
- 400 amp plus 2x 200 amp with Cam-Lock Disconnects
- 3-Phase 208v
- Additional power on Catwalks

**Floor:**

- 200 psf load concrete

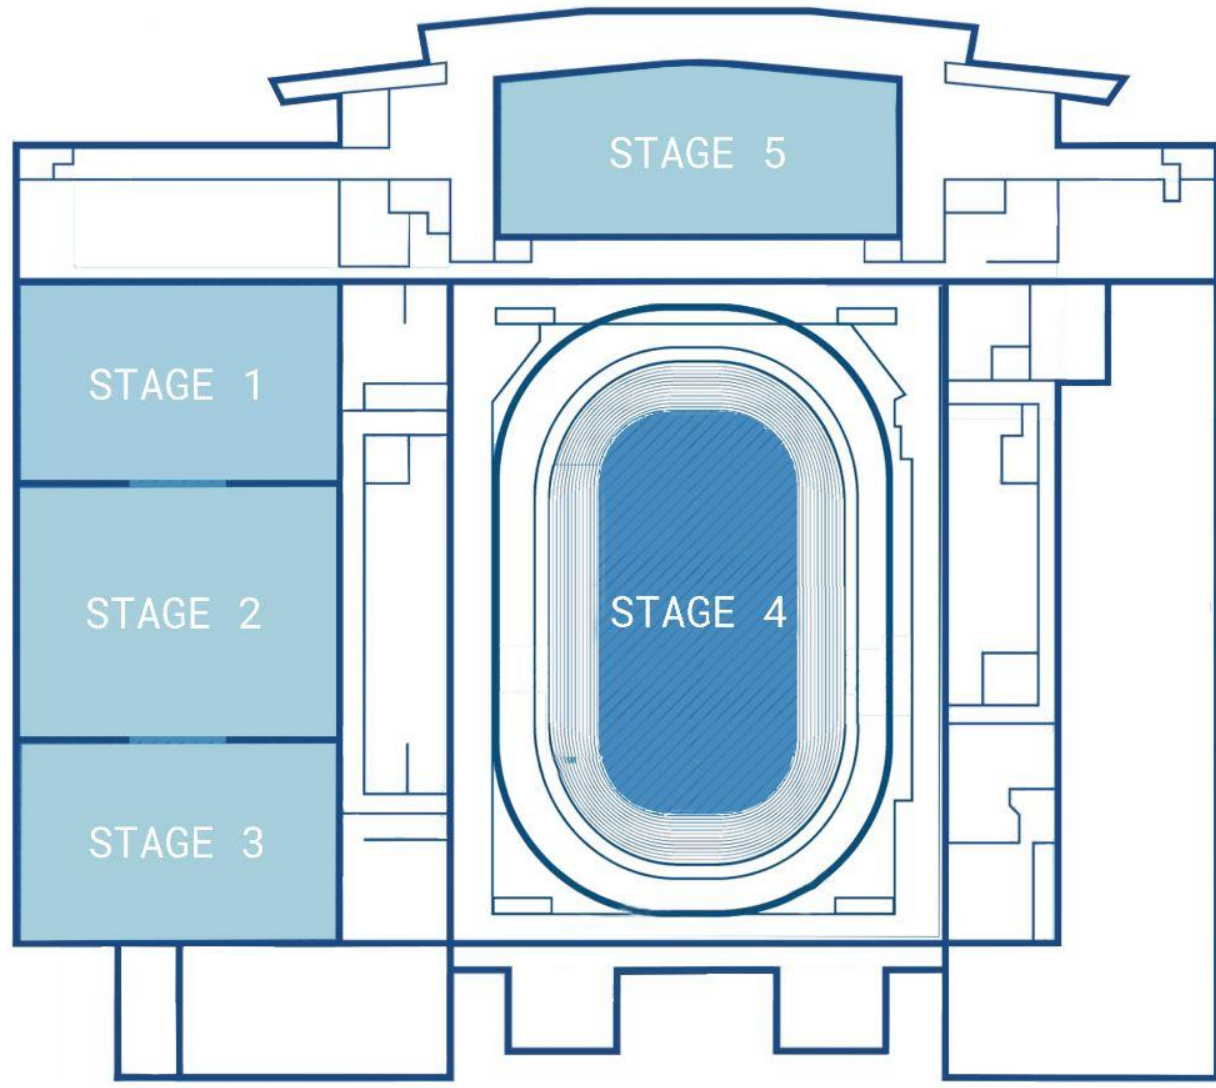





**Stage Measurements:**

- 24,500 Square Feet
- 21,500 + Firelane
- 245 x 100 ft

**Ceiling Height:**

- 25 ft ceiling height

**Grid:**

- None Installed
- 22,000 lb load limit in a 60 x 40 ft section
- Grid Designs available through our preferred vendor Killswitch, Inc and Hopper Engineering

**Access:**

- 2nd Floor
- Freight Elevator  
w x l x h  
12 x 20 x 8 ft
- 18 x 8.75 ft Barn Door

**Power:**

- 1800+ amp total draw
- 400 amp and 200 amp 3-Phase with tie-ins adaptable to Cam-Lock
- 208v

**Floor:**

- 130 psf floor load

